

바로 연결 가능한 저전압용 서보 드라이브 "servSD"



```
servSD > SR QPO1 NM6L K K J I
H G F E D $ CBA @? > = < ; : 698765 43 2 1 0 /
. - # , ! + * ) ( ' & % $ # " !
```

Connectivity to plc or modular safety controller

STO according to STO SIL3/PL e can be connected to a master motion PLC controller or to a modular safety controller. Two motor encoder signals A quad B RS422 can be daisy chained to the modular safety controller for Safe Motion monitoring, minimizing design complexity.

Master/slave communication

servSD to servSD real-time data exchange allows higher levels of axis synchronization and safer modes of operation.

Application examples

ServSD is suited to stationary and mobile low voltage applications in the following industries:

- Intralogistics incl. AGV, AMR
- Medical Equipment
- Laboratory Automation
- Printing Machines
- Electronic Assembly & Semiconductor Equipment

Supporting multiple types of motor feedback

servSD supports common motor feedback types incl. SSI, incremental and BiSS. With STO functional safety the servSD meets the full range of resolution and safe operation requirements from basic to highly dynamic applications.


Simple commissioning Motor Controller GUI with comprehensive parameterization options

Step-by-step guidance through the motor setup, application configuration and tuning process.





Key benefits

- High power density in a small footprint
- Ready-to-connect. No need for pin soldering or cable adaptors
- STO functional safety (SIL 3/PL e)
- Supports multiple types of motor feedback (SSI, incremental, BiSS)
- Meets the full range of resolution and safe operation requirements
- Near-motor mounting for tight space constraints applications
- Simple commissioning GUI with comprehensive parameterization options

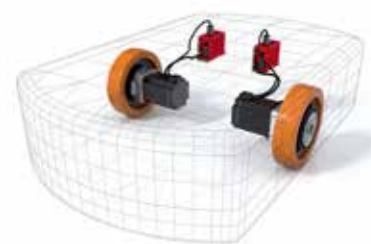

Related products

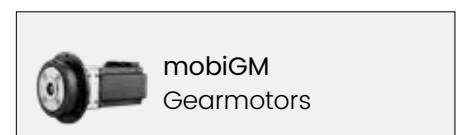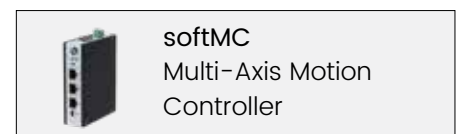

Model	Input bus (VDC)	Input logic (VDC)	Cont. current (Arms)	Peak current (Arms)	Width (mm)	Height (mm)	Depth (mm)
SD01-030	24	24	30	100	106	40	73.6
SD01-025	48	24	25	80	106	40	73.6

Communications:

CANopen
RS232


Motor Feedback:

Incremental Encoder
Hall Sensors
SSI Encoder

Digital I/Os:*

4 x Input
2 x Output
(*Upcoming)

Mechanical Dimensions:

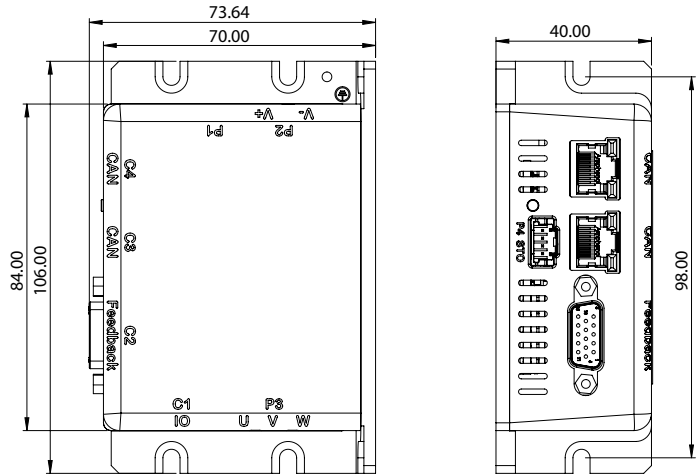

Ordering Information

	SD01	-	030	1D	AB	CA	-	000
servSD SD01 Single-Axis Servo Drive								
Rating – Cont. Current, Peak Current								
025	25, 80 Cont, Peak Arms @ 48VDC 45°C							
030	30, 100 Cont, Peak Arms @ 24VDC 45°C							
xxx	Custom							
Power								
1D	Bus 20-60 VDC, Logic 24 VDC optional							
xx	Custom							
Feedback								
AB	Incremental AB quadrature, index, Halls, 12 bit RS422							
AS	Incremental AB quadrature, Halls, 12 bit RS422 and SSI (upcoming)							
xx	Custom							
Communication								
CA	CANopen							
xx	Custom							
Options								
000	Standard							
00M	Mating connector (P1, P2, P3, P4, C1)							
xxx	Custom							



servSD_EN_2021_V1